


# Protek Systems, Inc

www.proteksystem.com

Protek Systems, Inc  
 2799 N.W. 2nd Ave.  
 Boca Raton  
 Telephone: 800-598-2153  
 Fax: 800-347-9149  
 sales@protekmail.com

## HDPE Series: 100% Recycled High Density Polyethylene Protek Bumper Base

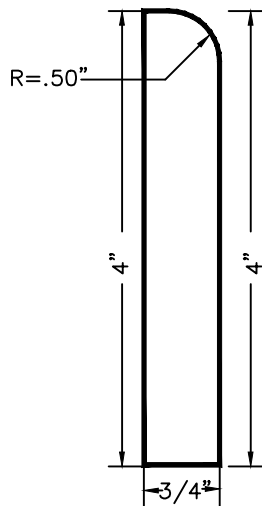


\* Wall Guard is supplied undrilled and with no mounting hardware.

### FEATURES:

- Extruded 100% Post-Consumer HDPE
- Density: (ASTM D6111) .024-.027 lbs/cu-in
- Modulus of Elasticity: (ASTM D6109) 114,000 psi at 1% strain
- Ultimate Flexural Stress: (ASTM D6109) 2300 psi at 3% strain
- Allowable Flexural Stress: (ASTM D6109) 1200 psi
- Endwise Compressive Stress: (ASTM D6108) 1740 psi at 3% strain
- Screw Withdrawal: (ASTM D6117 7) 90 lbs (#10 x 1 1/2")
- Water Absorption, 11 weeks: (ASTM D570) less than 0.1%
- Coefficient of Thermal Expansion: (ASTM D6341) .000055 in/in/°F
- Stock length: 12'-0" [3658]
- Minimum's apply

### STANDARD COLOR:

- Manufacturer's standard colors
- UV Inhibited pigments
- Minimum's apply
- Optional Plugs

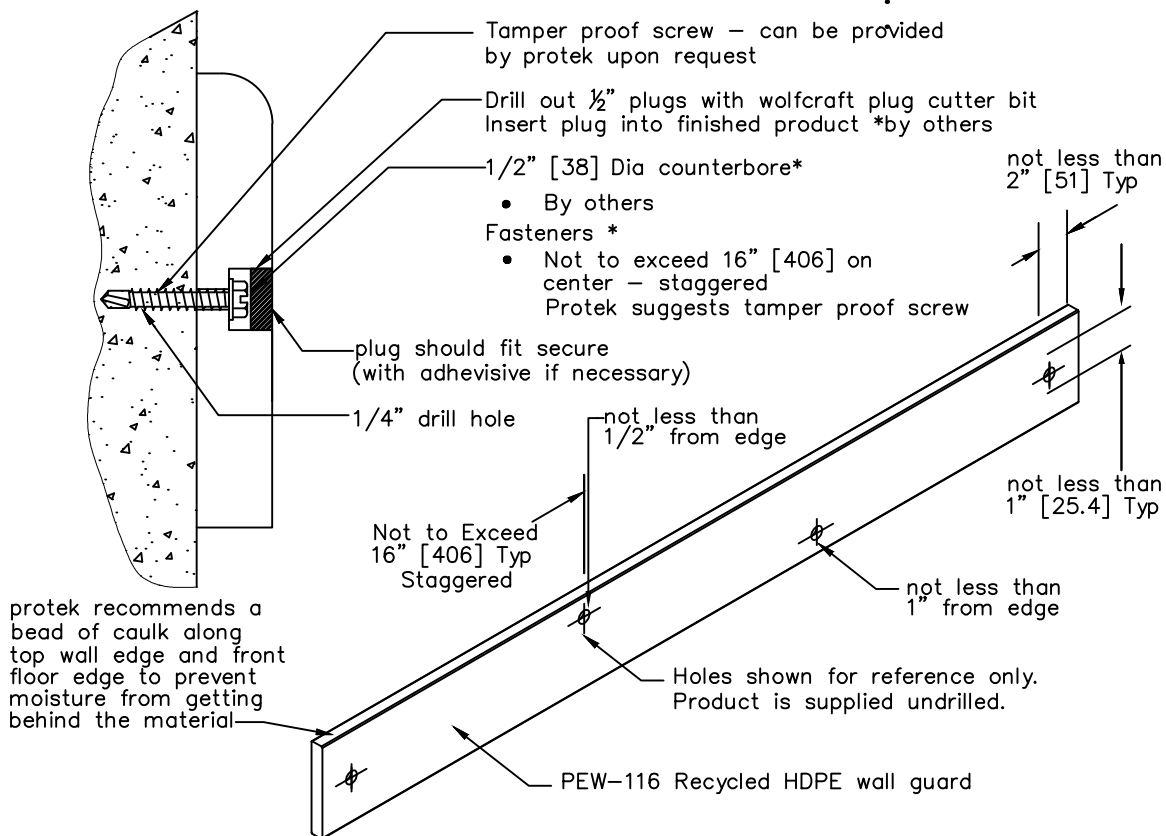

Customer:

Project:

HDPE-B4 Series

Architect:

Sales Rep: