


HDPE Series: 100% Recycled High Density Polyethylene Protek Bumper Base

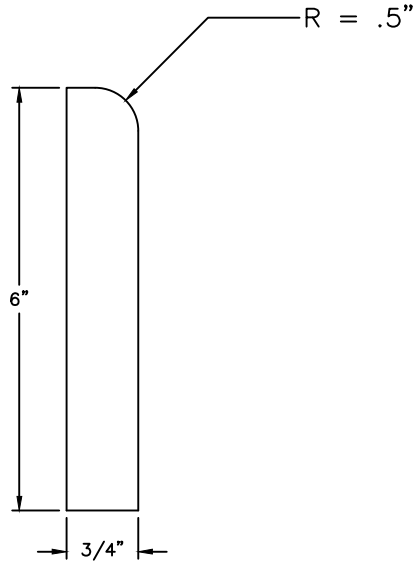


FEATURES:

- Extruded 100% Post-Consumer HDPE
- Density: (ASTM D6111) .024-.027 lbs/cu-in
- Modulus of Elasticity: (ASTM D6109) 114,000 psi at 1% strain
- Ultimate Flexural Stress: (ASTM D6109) 2300 psi at 3% strain
- Allowable Flexural Stress: (ASTM D6109) 1200 psi
- Endwise Compressive Stress: (ASTM D6108) 1740 psi at 3% strain
- Screw Withdrawal: (ASTM D6117 7) 90 lbs (#10 x 1 1/2")
- Water Absorbtion, 11 weeks: (ASTM D570) less than 0.1%
- Coefficient of Thermal Expansion (ASTM D6341) .000055 in/in/F
- Stock length: 12'-0" [3658]
- Minimums apply

STANDARD COLOR:

- Manufacturer's standard colors
- UV inhibited pigments
- Minimum's apply
- Optional plugs

*Wall Guard is supplied undrilled and with no mounting hardware.

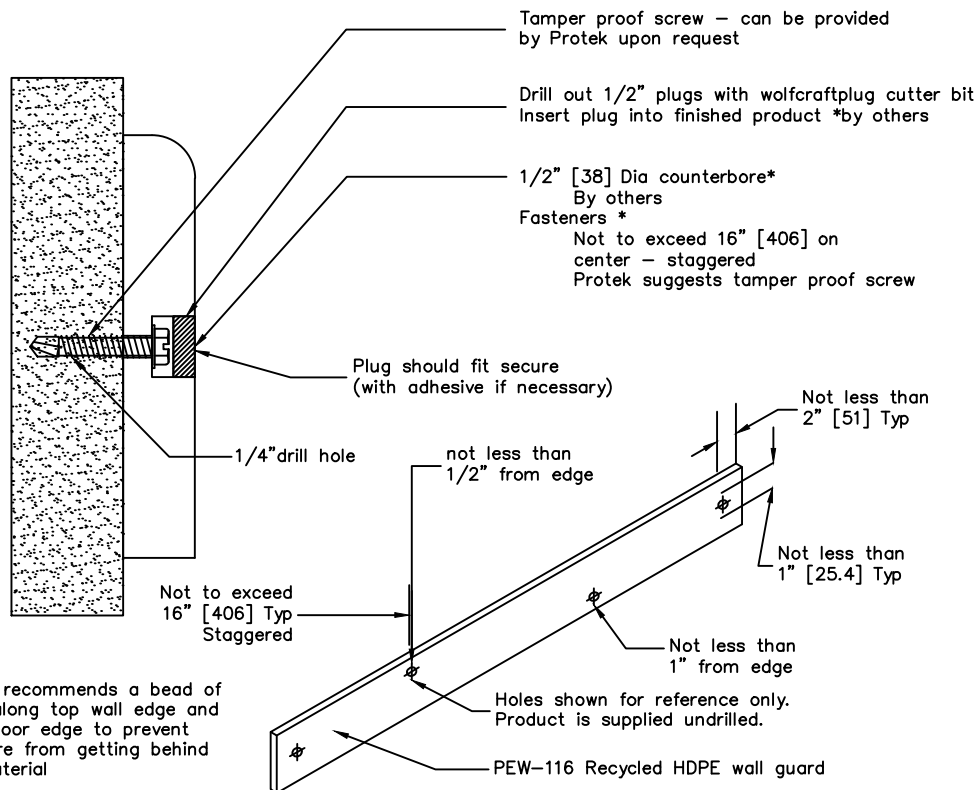

Customer:

Project:

Architect:

Sales Rep:

HDPE-B6 Series